



# 红巨星

# 1.1

# 1

		S1908+ 8 10Base-T/100Base-TX RJ45 fl A8=#A8=L ȷ 1 Console
		S1916+ 16 10Base-T/100Base-TX RJ45 fl A8=#A8=L ȷ 1 1 Console
		IEEE 802.3-2002 IEEE 802.1D IEEE 802.1Q 802.1x
		10Base-T 3 3 UTP STP 100Base-TX 5 UTP STP %\$6UgY!: L AA: fl ȷ %\$6UgY!: L! G GA: fl ȷ 1000Base-TX 5 UTP STP 1000Base-SX MMF 1000Base-LX SMF MMF
LED	POWER	
	RJ45	Link/ACT 100Mbps LED
		Module Link/ACT 1000Mbps 100Mbps

1.

2.



LED

LED					
10BASE-T/100BASE-TX RJ45	LED (POWER)			% &	
	# @ @b_#57 H			1) 2) 3) 4)	
	%%\$AVdg @ f%%\$AVdg	LED	%%\$AVdg	F>() %\$AVdg	
	LED Module				

#

2)

4)

%%\$AVdg

LED

10Mbps

@98

%%\$AVdg


%%\$A

2-8 S1908+

2-7 2-8

M3\*6FMO


M3\*6FMO

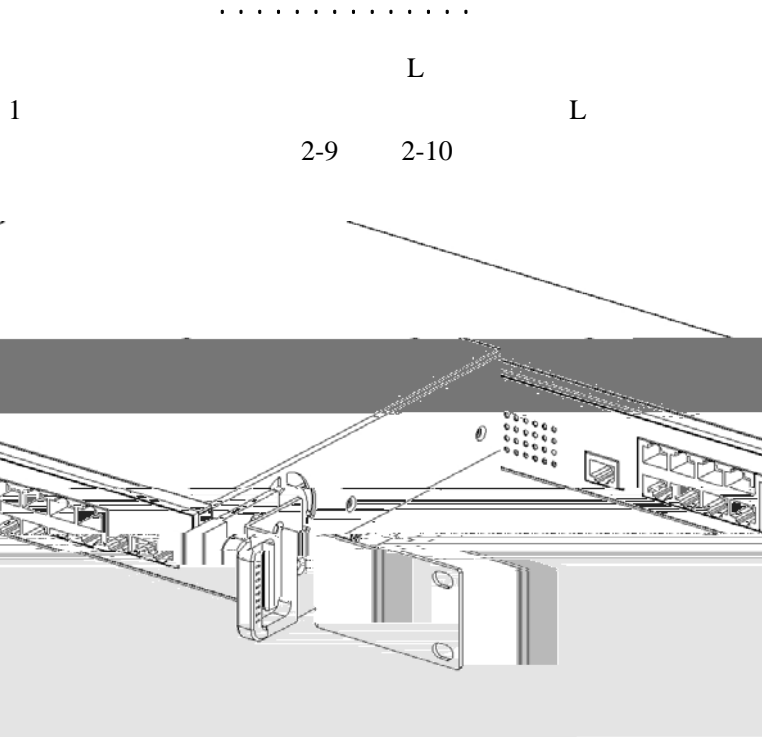

M3\*10FMO

M3\*10FMO

2-9 S1916+

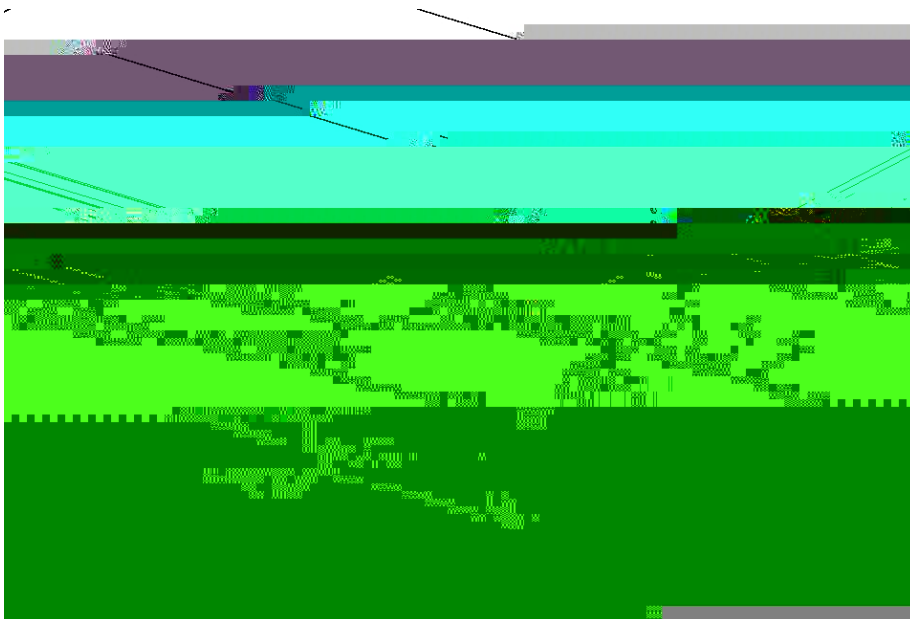


2-10 S1908+


2  
3

2-11 2-12

Ping

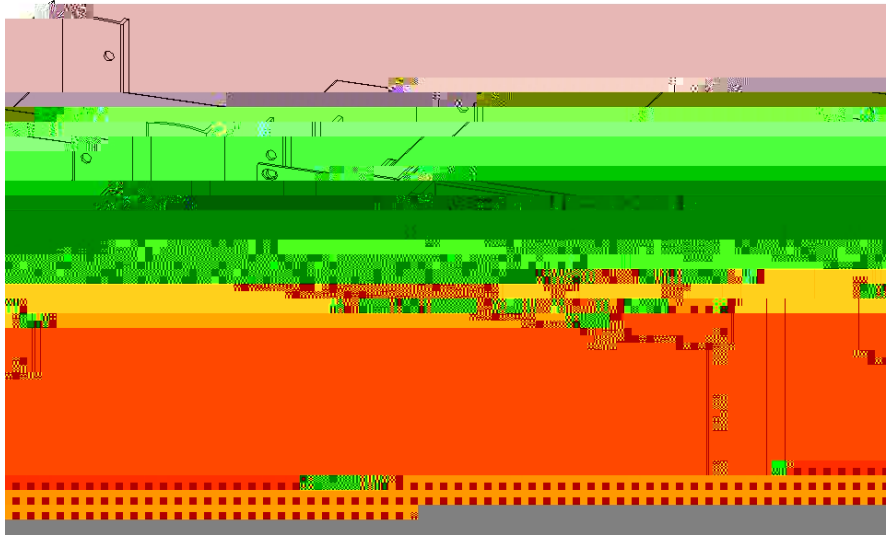

2-11 S1916+

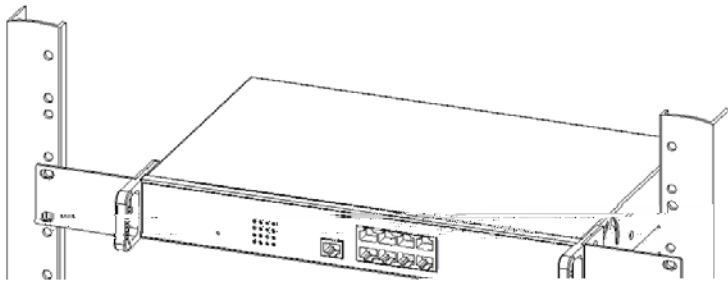

2-12 S1908+

.....

1	10Base-T	3	3	UTP	STP
---	----------	---	---	-----	-----

20%	100Base-TX	5		UTP	STP
30%	<del>100Base-TX</del>	<del>5</del>	<del>4</del>	<del>UTP</del>	<del>STP</del>

4dB @ 2#AVD9x4K69x5%

## 2.4



